

# LLTF CONTRAST™

## THE ULTIMATE SUPERCONTINUUM FILTER UP TO 20W INPUT POWER




The Laser Line Tunable Filter (LLTF) is a non-dispersive tunable bandpass filter based on volume holographic gratings. It delivers the highest signal throughput in the industry, and is also unique in that it combines very high optical density (> OD6) and outstanding out-of-band rejection with wide tunability. A single filter can be tuned from 400 nm to 1000 nm (VIS) or 1000 nm to 2500 nm (SWIR), with bandwidths (FWHM) of <2.5 nm and <5 nm respectively. The output pointing is very stable, removing the need to realign optical setup. The LLTF Contrast is compatible with any VIS-NIR supercontinuum or laser source. Depending on the application, a series of options are available.

TECHNICAL SPECIFICATIONS			
	CONTRAST VIS	CONTRAST SWIR	CONTRAST X
Spectral Range (extended and reduced spectral ranges also available**)	400 - 1000 nm	1000 - 2300 nm (2500 nm optional*)	where X represents a custom spectral range
Bandwidth (FWHM)	1.0 - 2.5 nm	2.0 - 5.0 nm	<b>High resolution</b> 0.15 nm - 0.9 nm
Out of Band Rejection (fibered output or with the background suppressor accessory)	< -60 dB @ ± 40 nm	< -60 dB @ ± 80 nm (measured up to 1.7 μm)	Depends on the bandwidth
Maximum input average power	HP8 (up to 8W), HP20 (up to 20W)	HP8 (up to 8W), HP20 (up to 20W)	HP4 (up to 4W)
Peak Efficiency	typically around 65%		
Optical Density (OD)	> OD6 (measured at 1064 nm)		TBD
Damage Threshold	< 5 GW/cm <sup>2</sup> peak power @ 1064 nm, 8 ns		
Input Beam Diameter	5 mm		
Input Beam Divergence Requirement	< 0.45 mrad		
Wavelength Resolution (Relative)	FWHM / 8		
Pointing Stability	< 1 mm lateral displacement @ 1 m from filter		
Scanning speed (multiple step)	35 ms stabilization time for 0.1 nm step, 45 ms stabilization time for 0.2 nm step, 55 ms stabilization time for 1 nm step, 60 ms stabilization time for 2 nm step, 65 ms stabilization time for 5 nm step, 70 ms stabilization time for 10 nm step		
Operating System (OS)	Windows Vista (32 & 64 bits), Windows 7 (32 & 64 bits), Windows 8 (32 & 64 bits)		
Software	PHYSpec™ included (SDK available)		
Computer Connection	USB 2.0 (compatible 1.1)		
Dimensions (L x W x H)	9" x 6.3" x 6.7" 23 cm x 16 cm x 17 cm		
Operating Temperature	5 to 40°C		
Storage Temperature	0 to 50°C		
Power Supply	100 - 240 V , 50 - 60 Hz		

OPTIONS & ACCESSORIES			
Enhance SWIR	N/A	* up to 2500 nm	
Fibered Output	An X-Y-Z translation adjustment allows coupling optimization.		
Harmonic Filter	Blocks the harmonics coming from the region 400-500 nm	Blocks the harmonics coming from the region 500-1000 nm and/or 1000-1250 nm	Filter chosen according to spectral range
Alignment Kit (for free space)	In free-space (input/output) configuration, the alignment kit allows the user to rapidly find the correct alignment		
** Extended and reduced spectral ranges also available	e.g.: 500-2000 nm, 400-1700nm, 500-900 nm, 400-650 nm, 650-1000 nm, 1000-1700 nm, 1700-2300 nm, etc.		

## LLTF VIS AND SWIR OUTPUT POWER

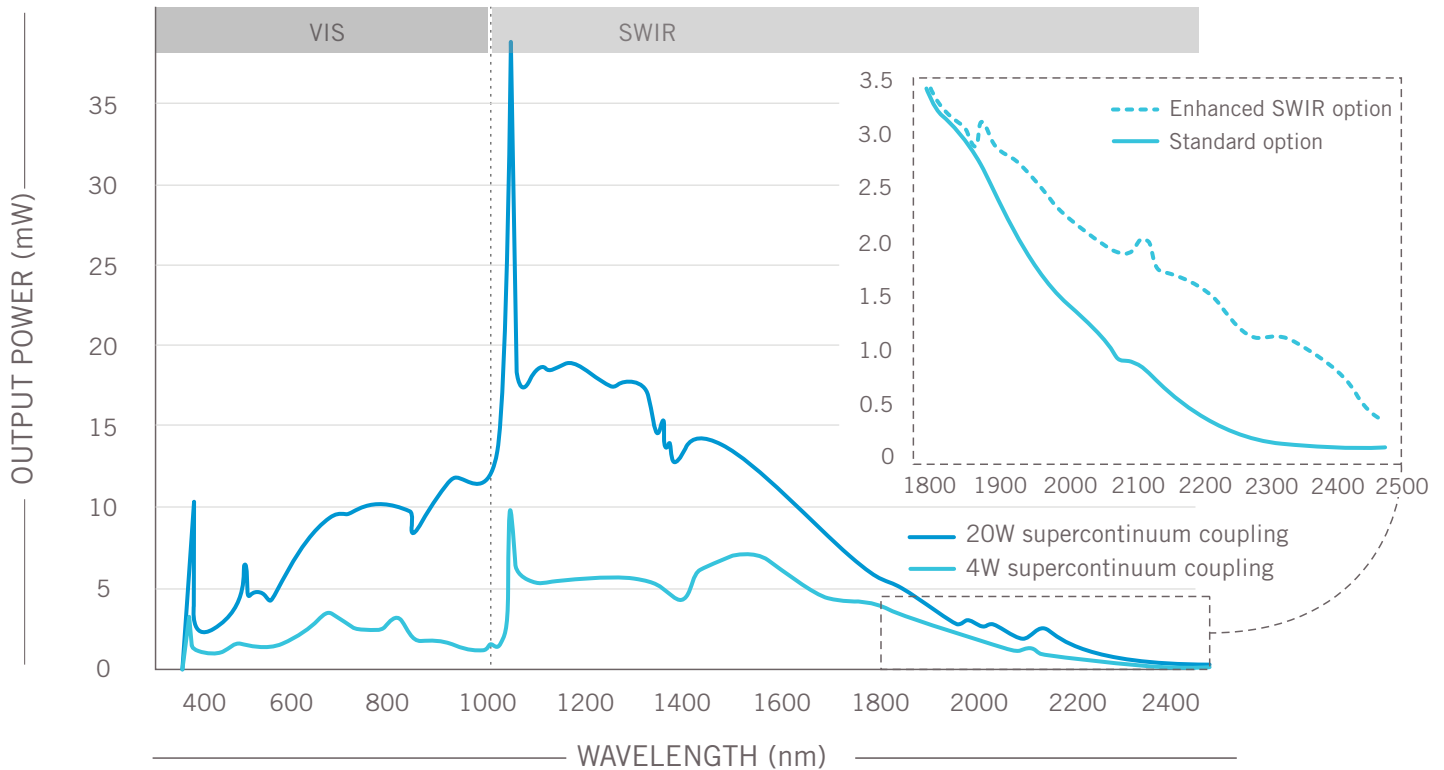

## LLTF EXTENDED (500-2000 nm) OUTPUT POWER


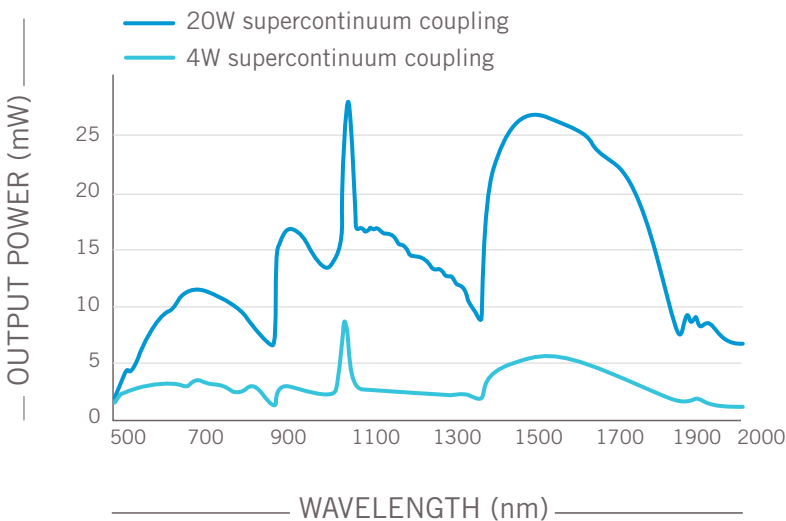


Illustration of the out-of-band rejection of a volume holographic grating at  $\lambda_c = 632$  nm. Bands of  $\pm 45$  nm are presented and an out-of-band rejection of  $-60$  dB is obtained.

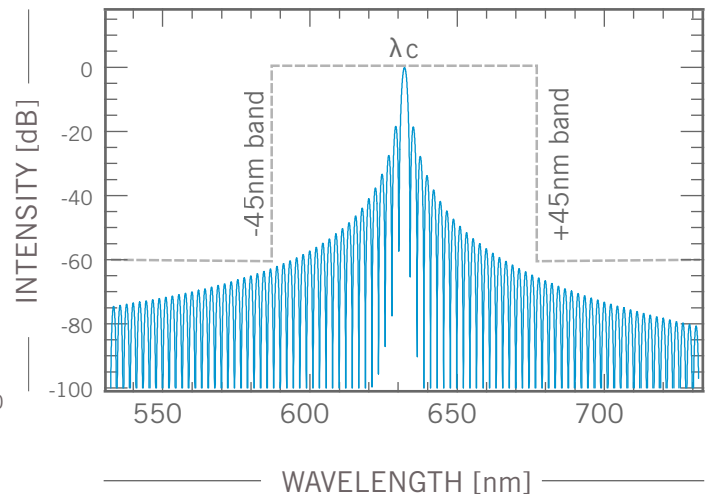

## DISTRIBUTORS

### FRANCE

OPTON LASER INTERNATIONAL  
+33 (0)1 69 41 04 05  
ventes@optonlaser.com

### SPAIN

IZASA SCIENTIFIC S.L.U.  
+902 20 30 80  
jrecasens@izasascientific.com

### PORTUGAL

IZASA SCIENTIFIC LDA  
+351 21 424 73 00  
info-pt@izasascientific.com

### UNITED KINGDOM & IRELAND

PRO-LITE TECHNOLOGY LTD  
+44 (0) 12344 36110  
nick.barnett@pro-lite.co.uk

### GERMANY, SWITZERLAND, AUSTRIA & EASTERN EUROPE

SPHEREOPTICS  
info@sphereoptics.de  
+49 (0)8152 983 78-90

### GERMANY, SWITZERLAND, AUSTRIA

MD INNOVATION TECH GMBA  
+49 9233 7157745  
info@md-innovationtech.com

### POLAND

LABNATEK  
+22 119 47 17  
info@labnatek.pl

### JAPAN

TOKYO INSTRUMENT  
+81 3 3686 4711  
sales@tokyoinst.co.jp

### INDIA

INKARP INSTRUMENTS PVT. LTD  
+914027172293  
harishk@inkarp.co.in

### CHINA

AUNION TECH  
+86 21 51083793  
info@auniontech.com